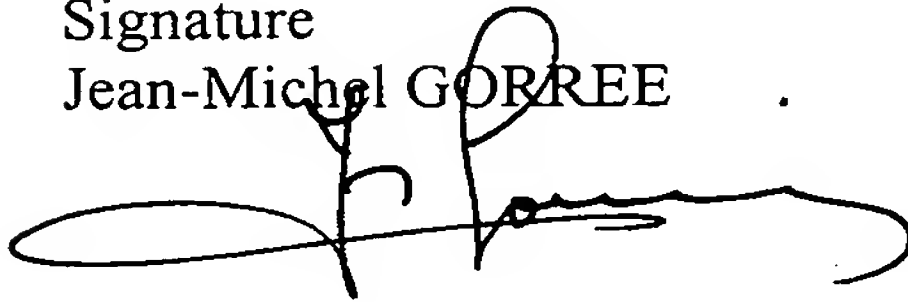


CERTIFICATION OF TRANSLATION

I, Jean-Michel GORREE, of CABINET PLASSERAUD, 52, rue de la Victoire, 75440 PARIS Cédex 09, France, do hereby declare that I am well acquainted with the French and English languages, and attest that the document attached is a true English language translation of the text of the International Patent Application PCT/FR2005/000774 of March 30, 2005

Dated this 1st., of September 2006

Signature
Jean-Michel GORREE

A handwritten signature in black ink, appearing to be 'J. Gorree', written over the printed name 'Jean-Michel GORREE'.

VALVE COMPRISING A MAGNETIC CONTROL DEVICE

The present invention concerns improvements to valves
5 comprising a shutter moving in a chamber one end of
which is provided with a seat which the shutter bears
against in a closed position of the valve or is moved
away from in an open position of the valve, and wherein
the movement of the shutter is obtained by a magnetic
10 control device disposed outside the chamber and
magnetically coupled to the shutter.

Such valves are intended in particular to be used in
food product filling machines, in particular for
15 liquids.

The document EP 0436214 describes a magnetic valve
equipped with a shutter and a control member outside
the tubular body of the valve. The shutter and the
20 control member have magnetized portions and the control
member can be moved along the body so that the magnetic
attraction exerted when the control member is moving
causes movement of the shutter to open or to close the
outlet orifice of the valve. In that valve, the
25 external control member is moved by a pneumatic system
that is integrated into the body of the valve.

However, such a device has the drawback of high
friction forces between the shutter and the inside wall
30 of the chamber because the shutter, which is attracted
by the externally situated magnet, may stick more or
less strongly to said inside wall. This results in the
risk of premature wear of the wall and/or the shutter
and/or of deposition of particles in the chamber and
35 their passage into the liquid to be distributed;
furthermore, this kind of valve is difficult to clean,
in particular in the friction areas, in which the
cleaning liquid cannot circulate or can circulate only
with difficulty.

The object of the invention is to provide a valve arrangement in which the areas of friction between the body of the valve and the shutter are reduced or even
5 eliminated in order to overcome the mentioned drawbacks.

According to the invention, a valve comprising a shutter placed in a chamber provided in the valve body,
10 one end of said chamber being provided with a seat which a flap-forming part of the shutter rests against in a closed position of the valve and is remote from in an open position thereof and a magnetic control device including shutter magnetic drive means disposed outside
15 the chamber for moving it either to its closed position or to its open position is characterized in that the magnetic control device further comprises at least one ball which is made of a magnetic material, disposed in the chamber and coupled to the external magnetic drive
20 means, said ball being associated with the shutter in such a way that said shutter is driven in the chamber when the ball is moved by the magnetic drive means.

According to other features of the invention:

- 25 - the ball turns freely relative to the shutter;
- the shutter includes at least one housing in which at least one ball is placed;
- the valve is adapted to enable centering of the shutter in the valve body;
- 30 - the shutter is associated with at least two balls that cooperate therewith and the body of the valve to provide centering by the external magnetic drive means;
- the centering means are disposed inside the chamber, on the lateral wall thereof, to cooperate with the
35 shutter;
- the centering means are disposed on the shutter to cooperate with the internal lateral wall of chamber;
- the centering means are fins;

- the shutter is associated with at least two balls offset longitudinally relative to the axis of the shutter;
- at least one section of the shutter is associated with at least two balls that are offset angularly relative to each other;
- two separate sections of the shutter are each associated with at least two balls disposed so that the circumferential offset between two successive balls of the same section is less than or equal to 180° ;
- the (n) balls of a section are offset angularly by an angle equal to $360^\circ/n$.

Other features and advantages of the invention will become apparent on reading the following detailed description given with reference to the appended drawings, in which:

Figure 1 is a diagrammatic view in axial section of one embodiment of a valve of the invention whose magnetic control device comprises a single ball;

Figure 2 is a diagrammatic view in cross section taken along the line AA in figure 1;

Figure 3 is a diagrammatic view in axial section of a first embodiment of the valve of the invention whose magnetic control device comprises two balls that are not placed on the same section;

Figure 4 is a diagrammatic view in axial section of a second embodiment of the valve of the invention whose magnetic control device comprises two balls that are placed on the same section;

Figure 5 is a diagrammatic view in axial section of a third embodiment of the valve equipped with two magnetic control devices each comprising two balls placed on the same cross section;

Figure 6 is a diagrammatic view in cross section of one of the figure 5 control devices;

5 Figure 7 is a diagrammatic view in axial section of what is shown in figure 6, and constitutes a more detailed view of the areas immediately above and below the section line BB in figure 5;

10 Figure 8 is a diagrammatic view in axial section of another embodiment with more than one ball;

Figure 9 is a diagrammatic view of the figure 9 valve in cross section taken along the line CC in a plane
15 defined by a ball and the drive means.

In Figure 1 a valve 110 is shown that is intended to be installed in a container filling installation, for example.

20

The valve 110 has a tubular general structure. At its center it includes a chamber 12, here of cylindrical section, which is delimited by a central tube having an axis A1.

25

In the following description, the terms lower, upper, top, bottom, etc. are used with reference to the drawings for easier comprehension. They must not be understood as being limiting on the scope of the
30 invention, in particular with regard to the orientation of the valve. The vertical orientation of the axis A1 of the valve is merely appropriate to one preferred embodiment of the invention.

35 In the present example, the upper portion of the valve includes an orifice 115 which is adapted to be connected to a supply tank (not shown) and which opens into the chamber 12. The section of this orifice 115 is smaller than the cross section of the chamber 12. The

lower portion of the chamber 12 ends at a closure seat 116 adapted to receive a corresponding portion of the shutter 20. The seat 116 has a frustoconical general shape and is extended in the downward direction by a cylindrical portion of smaller diameter than the chamber 12 forming the outlet orifice of the valve as such.

The shutter 20 has two main portions:

- 10 - a first portion consisting of an amagnetic material flap 121 which has a frustoconical section and is adapted to cooperate with the seat 116 of the valve in the closed position of the valve. The seal is reinforced by a seal 124 around the flap 121.
- 15 - a second portion in the form of a stem 122 which is axially aligned with the flap and consists of an amagnetic material such as stainless steel. The outside cross section of the stem 122 is everywhere less than the inside cross section of the chamber 12 so that the shutter 20 is able to move freely in the chamber 12 both ways along the axis A1.

According to the invention, the control device comprises drive means 130 based here on coils or magnets 132 placed outside the body of the valve, and thus of the chamber 12, and a magnetic material ball 123 placed inside the chamber 12.

The ball is made of soft iron, pure iron or an alloy of one or both of these materials, for example.

According to the invention, the ball 123 is associated with the shutter 20 in order to drive it in translation in the body of the valve when the ball itself is driven by the coils or magnets 132. To this end, a transverse housing 124 is formed in the body of the shutter 20, for example in the vicinity of the top of the stem, and the ball is disposed in the housing. The dimensions of

the housing are such that the ball can turn freely inside it.

Moreover, the diameter of the ball 123 is significantly
5 less than the inside cross section of the chamber 12,
so that the ball can roll freely in the chamber 12
whilst being held in the housing 124 of the shutter 20,
in which it also turns freely.

10 In a manner known per se, the drive means 130 including
the coils or magnets 132 are placed outside the valve
body, and can be moved in a direction parallel to the
axis A1 (double-headed arrow 133), either downwards
(valve closing direction) or upwards (valve opening
15 direction) in such a manner as simultaneously to drive
the ball, which in turn moves the shutter 20. The drive
means 130 may be moved by any appropriate drive device
(not shown) such as a piston-and-cylinder.

20 Figure 2 is a diagrammatic view of the figure 1 control
device in cross section taken along the line AA in
figure 1. It shows the whole of the tubular valve body
delimiting the chamber 12 in which the shutter 20
moves. The drive means 130 are outside the body of the
25 valve. In the present example, the drive means 130
carry two diametrically opposed magnets 132 on
respective opposite sides of the outside wall of the
tubular body so as to orient the magnetic flux lines so
that they converge substantially toward the center of
30 the ball 123 to achieve the best possible coupling.

At least one longitudinal groove 113 is machined into
the inside wall of the chamber to allow the fluid to
pass on either side of the ball 123. At least two
35 grooves 113 are preferably provided, as in the present
example, evenly distributed at the periphery of the
chamber: here two diametrically opposed grooves are
shown. They are machined across the whole of the axial
section of the chamber 12. The ball is trapped between

two circular arc-shaped areas 114 that are separated from each other by the grooves 113, the distance between the two areas being slightly greater than the diameter of the ball, and the magnets are preferably
5 disposed facing these areas. Thus the ball "rolls" preferentially on one of these areas, which constitutes a rolling area, according to the orientation of the magnetic field produced by the coils or magnets. It should be noted that the other area is not in contact
10 with the ball, but facilitates centering it when assembling the valve; what is more, it could very well become a bearing area if the magnets were fitted the other way around, for example following a maintenance operation. When the shutter is moved to the open
15 position, the fluid can flow in the two grooves 113 provided for this purpose.

The valve is moved to the closed position or the open position by moving the magnetic control device in the
20 appropriate direction. Operation is optimized if the valve is positioned as shown in the figures, i.e. with the liquid inlet at the top and the outlet at the bottom, with the drive means disposed at a level lower than the ball when the valve is closed; with this kind
25 of configuration, the flap tends to be forced onto the seat not only by magnetic attraction but also by the static pressure exerted on the ball.

The mode of operation that has just been described is
30 exactly the same for other embodiments of the present valve except that the control device, i.e. the drive means 130, and the number of balls and their disposition in the shutter 20 are modified.

35 In the figure 3 embodiment, the valve 110 has a tubular general structure, is made from an amagnetic material and delimits the chamber 12. The fluid flows in the gap between the shutter 20 and the chamber 12.

In this embodiment, in a similar way to what is shown in figures 1 and 2, the its upper portion of the valve includes an orifice 115 that is adapted to be connected to a supply tank (not shown) and opens into the chamber 12. This orifice 115 has a section smaller than the cross section of the chamber 12. The lower portion of the chamber 12 ends at a closure seat 116 adapted to receive a corresponding portion of the shutter 20. The seat has a frustoconical general shape and is extended in the downward direction by a cylindrical portion of smaller diameter than the chamber 12 forming the outlet orifice of the valve as such. The seat 116 seals the valve when closed by the facing flap 121.

As can be seen in figure 3, the diameter of the upper portion of the stem 122 of the shutter is less than that of the chamber 12 and tends to increase in a frustoconical manner from the upper portion to the lower portion in which the flap 121 is located.

In this embodiment, the first portion of the control device of the shutter 20 comprises two balls 123 offset axially and diametrically. Two centering members 324 in the form of amagnetic material lugs or fins for stabilizing the shutter 20 are placed on the stem 122 of the shutter 20 or alternatively on the inside wall of the chamber 12 and center the shutter 20 in the chamber 12 at the same time as allowing free movement of the shutter 20; in other words, a gap is left between the centering members 324 and the inside wall of the chamber 12 or alternatively the stem of the shutter 20.

In this embodiment, the stem is provided with as many housings 124 as the device includes balls. Each housing 124 has dimensions such that when the shutter 20 is fitted, i.e. centered by the centering members 324, each housing receives a ball, which can turn freely in

said housing and on the lateral inside wall of the chamber 12.

Here the drive means 130 are such that each of the
5 balls is associated with at least one coil or one magnet 132 of its own. Moreover, the coil(s) or magnet(s) 132 are fastened together so that they move at the same time.

10 The embodiment that has just described is merely one nonlimiting example of the invention. Other constructive dispositions might be encountered in which the distribution of the balls on the shutter 20 or the distribution of the bearing members 324 on the body of
15 the shutter 20 or in the chamber 12 are modified.

In operation, the valve is normally held closed by the magnetic control device, which tends to cause the flap to bear on the seat, as well as by the weight of the
20 shutter 20 and by the static pressure that is exerted on the balls if the coils or magnets 132 are disposed at a level such that their force of attraction is below the diametral plane of the balls and if the valve is disposed vertically as shown in figure 3 (with the flap
25 at the bottom). In use, the drive means 130 and therefore the coil(s) or magnet(s) 132 are moved and the magnetic attraction tends to move the balls that drive the shutter 20.

30 Figure 4 shows another embodiment in which the control device includes two diametrically opposed balls placed on the same cross section. This arrangement further improves the operation of the shutter 20.

35 The control device further includes drive means 130 adapted to take account of the arrangement of the two balls 123 on the same section. To this end, the drive means 130 include a cylindrical magnetic body that carries two diametrically opposed magnets 132 disposed on

respective opposite sides of the outside wall of the tubular body delimiting the chamber 12 to obtain the best coupling between the magnets and the two balls.

5 Centering is improved by providing bearing members 324 under the control device consisting of the balls and on the tubular body of the valve or on the body of the shutter 20 to achieve the best possible centering. In the example shown, these members are fins carried by
10 the shutter 20.

Figure 5 shows another valve embodiment similar to those described above except that centering is achieved in a different way. In fact, the valve comprises two
15 identical control devices, each of which includes two balls 123 placed on the same cross section of the shutter 20. The two devices are centered on the axis A1 of the valve but are offset longitudinally on that axis by a distance "h" and are offset circumferentially
20 relative to each other, preferably at 90°, for better distribution of the lifting force and better centering of the shutter 20. In other words, the two balls of a first device are carried by a first plane passing through the axis A1 of the valve and the two balls of
25 the second device are carried by a second plane passing through the axis A1 of the valve and perpendicular to the first one; also, the two balls of the same device are disposed on the same section perpendicular to the axis A1; the two balls of the other one are carried by
30 a second section perpendicular to the axis A1 but offset from the first one by a distance "h". As shown, guiding is preferably completed in a manner known in the art by two perpendicular fins 524 interleaved with each other and offset longitudinally relative to the
35 control devices, here placed downstream of the devices in the direction of flow of the fluid, and carried by the stem of the shutter 20. The stem 122 of the shutter 20 terminates in a frustoconical portion under which the flap 121 is situated.

This embodiment of the valve includes drive means 130 with two sets of coils or magnets 132 that are mechanically linked to each other to move at the same time and are disposed so that one provides the coupling with the two balls of one section and the other with the two balls of the other section, offset by a distance "h".

Figure 6 is a diagrammatic view of one of the control devices in cross section taken along the line BB in figure 5. It shows the whole of the tubular body of the valve delimiting the chamber 12 in which the shutter 20 slides by means of balls each of which is disposed in a respective housing of the shutter 20. Outside the body of the valve are the drive means 130 that include a cylindrical magnetic body that carries two magnets 132 whose magnetic poles are preferably reversed relative to each other. They are placed on respective opposite sides of the outside wall of the tubular body to cause the magnetic flux to converge towards the two balls 123 in order to obtain the best coupling.

Figure 7 is a view of the arrangement of the balls 123 and the shutter 20 in the chamber 12 of the valve in axial section taken along the line B-B in figure 6. In the same cross section of the shutter 20 there is a hole 733 whose diameter is such that the two balls 123 of the same section cannot stick together because of magnetic attraction. This arrangement is introduced into the chamber 12 of the valve so that it slides freely in translation. The other portion of the control device, i.e. the drive means 130 with the coils or magnets 132 is on the same cross section but outside the valve body.

The operation of this type of valve is identical to that described with reference to the previous figures.

In the embodiment described with reference to figures 8 and 9, the latter figure being a view in section taken along the line CC in figure 8, the valve includes drive means 130 with two sets of coils or magnets 132 placed
5 outside the body of the valve and offset longitudinally on the axis A1 so that each magnetizes two balls 123 disposed on the same cross section of the shutter. The two sets of coils or magnets 132 are also fastened together so that they move at the same time. Each set
10 is similar to the figure 5 set, i.e. it includes a body with two coils or magnets 132 on respective opposite sides of the outside wall of the tubular body so as to orient the magnetic flux lines to obtain the best coupling with the balls.

15

The shutter 20 terminates in a flap 121 in its lower portion extending the stem. A seal 829 preferably surrounds the flap, as shown here.

20 The flap has a frustoconical section intended to cooperate with a seat 116 of the valve to provide a seal in the closed position.

The shutter 20 is preferably machined from a single
25 blank so that fitting it does not necessitate any welding which could introduce the risk of causing deformation at the level of the joint when it is being welded. That kind of operation would therefore have the effect of diminishing the accuracy of the centering of
30 the shutter 20 in the chamber.

As can be seen in figure 8, the flap is surmounted by another frustoconical section 821 that is surmounted by two perpendicular fins 825 interleaved one within the
35 other that center the shutter 20 in the chamber 12 of the valve at the same time as allowing the liquid to circulate between the fins 825 at 950 (figure 9).

The fins are surmounted by a cylindrical portion 826 whose diameter is less than the diameter of the chamber 12 and which is itself surmounted by two other portions 827, 828 that are offset longitudinally by a distance "h" and each of which contains the two balls 123 mentioned above placed on the same cross section. These two portions 827, 828 are separated from each other by a cylindrical intermediate section 830. As before, the balls in the same section are preferably diametrically opposed; the balls are offset circumferentially by 90° from one section to the other.

The inside diameter of the chamber is preferably substantially equal to the sum of the diameters of the two balls.

The balls of the same section are disposed in a housing 824 consisting here of a transverse bore formed in the stem which has a diameter significantly greater than that of the balls so that the latter may move freely therein. It should be noted that the fins 825 are machined from the same blank as the stem.

Figure 9 is a view in section taken along the line CC in figure 8 showing the shutter with the housing 824 in which the two balls 123 of the section are housed, the relative disposition of the balls and the fins 825 and the passages 850 that are left free for the fluid.

Of course, the invention is not limited to the embodiments described and design variants may be applied thereto without departing from the scope of the invention as defined by the claims. In particular, the control device may be equipped with a different number of balls (more than two balls per section; more than two sections equipped with balls).

Although the only embodiments shown in the figures are on/off valves, the production of variable flow valves

may be envisaged, for which purpose it suffices to vary the dimensions of the gap between the chamber 12 and the shutter 20.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.